









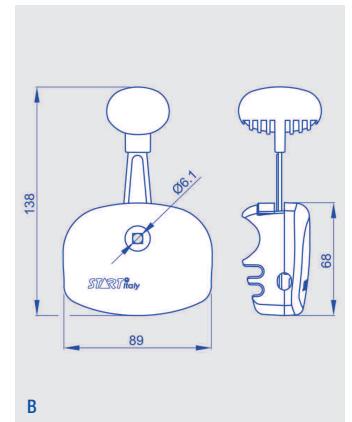

LATERAL MECHANICAL CONTROLS WITH TRACTION AND COMPRESSION ACTING WITH DIRECT ACTING (light loads applications - single cable) AND ORDER FORM MODEL AE 300S

Characteristics:

- Cable linear stroke: 21 - 39 - 43 - 47 mm (suitable for Honda engines particularly)
- Assembly: on walls and under bonnets or on tubes Fastening type: with through screw
- Tube outer diameter: 22 mm - 25 mm - 26 mm - 27 mm - 28 mm
- Functioning: frictioned - 3 positions - 4 positioning marks
- Holder and lever material: metal External casing and knob material: nylon
- Knob shape: round or rectangular Knob colour: red or black
- Sticker with writings and symbols: STOP forward (stop-min-max-start) - START forward (start-max-min-stop)

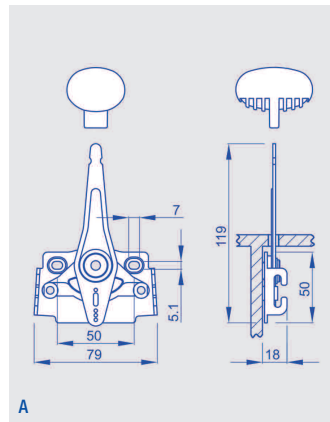

To order: compose, please, your product code inserting the boldfaced code corresponding to the chosen option in the proper square.

AE 300S										
---------	--	--	--	--	--	--	--	--	--	--

- Stroke mm 21: **P1**
- Stroke mm 39: **P2**
- Stroke mm 43: **P3**
- Stroke mm 47: **P4**

- Assembly on walls or under bonnets: **A**
- Assembly on tubes: **B**

- Wall fastening: **1**
- Tube fastening outer Ø mm 22: **2**
- Tube fastening outer Ø mm 25: **3**
- Tube fastening outer Ø mm 26: **4**
- Tube fastening outer Ø mm 27: **5**
- Tube fastening outer Ø mm 28: **6**

- Frictioned functioning: **F**
- Functioning with 3 positions: **3P**
- Functioning with 4 positioning marks: **4T**

Sheath locking spacer: **E**

- Sticker stop-min-max-start: **C**
- Sticker start-max-min-stop: **D**

- Red knob: **PR**
- Black knob: **PN**

- Round knob: **T**
- Rectangular knob: **R**


Sheath locking spacer (only for tube diameter 22 mm): it allows to fasten in a single way the accelerator and the sheaths of the blade brake and the advance levers, which are usually assembled on lawn mowers.



LATERAL MECHANICAL CONTROLS COMPATIBLE CABLES MODELS AE 250S - AE 100 - AE 300S

Characteristics:

- Sheath diameter: Ø5 mm or Ø6 mm with inner antifriction tube
- Sheath length: upon request
- Rigid wire diameter: Ø1,5 mm or Ø1,7 mm in phosphated steel (*)
- Wire protrusion length: upon request
- Sheath terminals: see table
- Wire terminals: see table

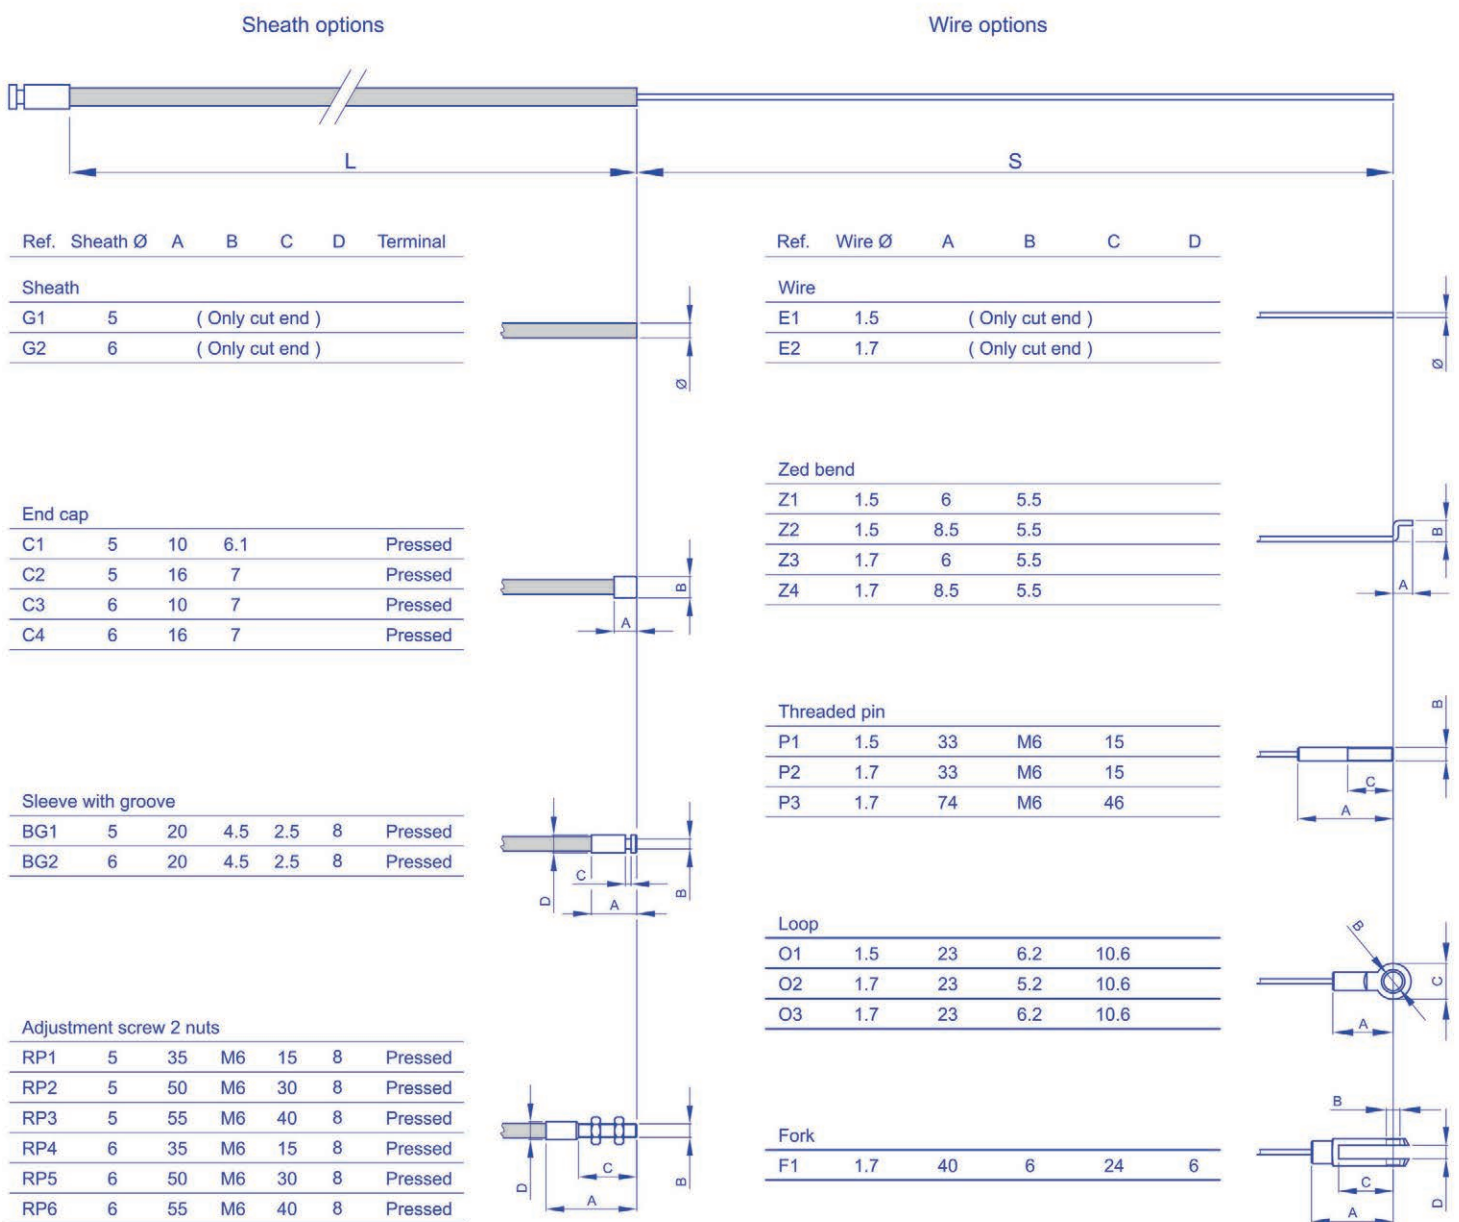



LATERAL MECHANICAL CONTROLS ORDER FORM FOR COMPATIBLE CABLES MODELS AE 250S - AE 100 - AE 300S

To order:

The technical options that are represented on the opposite page are the standard personalizations which are provided from the company.

Among these possibilities, you can choose the cable construction that meets your requirements.


At first choose the sheath diameter and select the corresponding terminals among the possible options.

Find out your preferences and fill in the boxes with the number or the letters/number corresponding to your options.

Example: if you choose a Ø6 mm sheath and you want an end cap as terminal, indicate the code 05 or 06, according to your needs.

And so on for other variables.

The same procedure must be used to choose the wire: start choosing the diameter and then select the corresponding options.

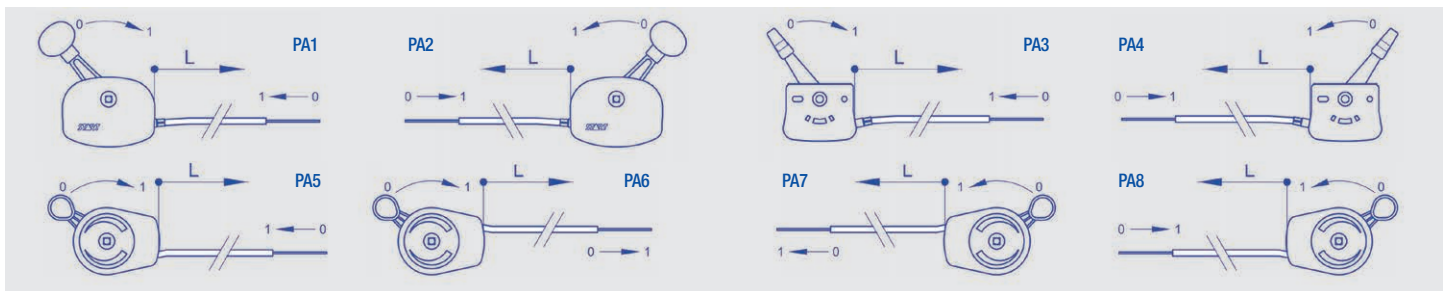

To order: compose, please, your product code inserting the boldfaced code corresponding to the chosen option in the proper square.

Cable					
-------	--	--	--	--	--

<p>Sheath length (L) in mm: _____</p> <p>Wire protrusion length (S) in mm: _____</p> <p>Sheath Ø5 mm (only cut) G1: 01</p> <p>Sheath Ø6 mm (only cut) G2: 02</p> <p>End cap C1: 03</p> <p>End cap C2: 04</p> <p>End cap C3: 05</p> <p>End cap C4: 06</p> <p>Sleeve with groove BG1: 07</p> <p>Sleeve with groove BG2: 08</p> <p>Pressed adjustment screw 2 nuts RP1: 09</p> <p>Pressed adjustment screw 2 nuts RP2: 10</p> <p>Pressed adjustment screw 2 nuts RP3: 11</p> <p>Pressed adjustment screw 2 nuts RP4: 12</p> <p>Pressed adjustment screw 2 nuts RP5: 13</p> <p>Pressed adjustment screw 2 nuts RP6: 14</p>		<p>Cable assembly: PA1</p> <p>Cable assembly: PA2</p> <p>Cable assembly: PA3</p> <p>Cable assembly: PA4</p> <p>Cable assembly: PA5</p> <p>Cable assembly: PA6</p> <p>Cable assembly: PA7</p> <p>Cable assembly: PA8</p> <p>Only cut rigid wire Ø1,5 mm without terminal E1: 15</p> <p>Only cut rigid wire Ø1,7 mm without terminal E2: 16</p> <p>Zed bend Z1: 17</p> <p>Zed bend Z2: 18</p> <p>Zed bend Z3: 19</p> <p>Zed bend Z4: 20</p> <p>Threaded pin P1: 21</p> <p>Threaded pin P2: 22</p> <p>Threaded pin P3: 23</p> <p>Loop O1: 24</p> <p>Loop O2: 25</p> <p>Loop O3: 26</p> <p>Fork F1: 27</p>
--	--	---