




COMBINED ELECTRIC / MECHANICAL CONTROLS COMPATIBLE CABLES MODEL AE 300SEL

Characteristics:

- Sheath diameter: Ø5 mm or Ø6 mm with inner antifriction tube
- Sheath length: upon request
- Rigid wire diameter: Ø1,2 mm in stainless steel or Ø1,5 mm in phosphated steel (*)
- Wire protrusion length: upon request
- Sheath terminals: see table
- Wire terminals: see table

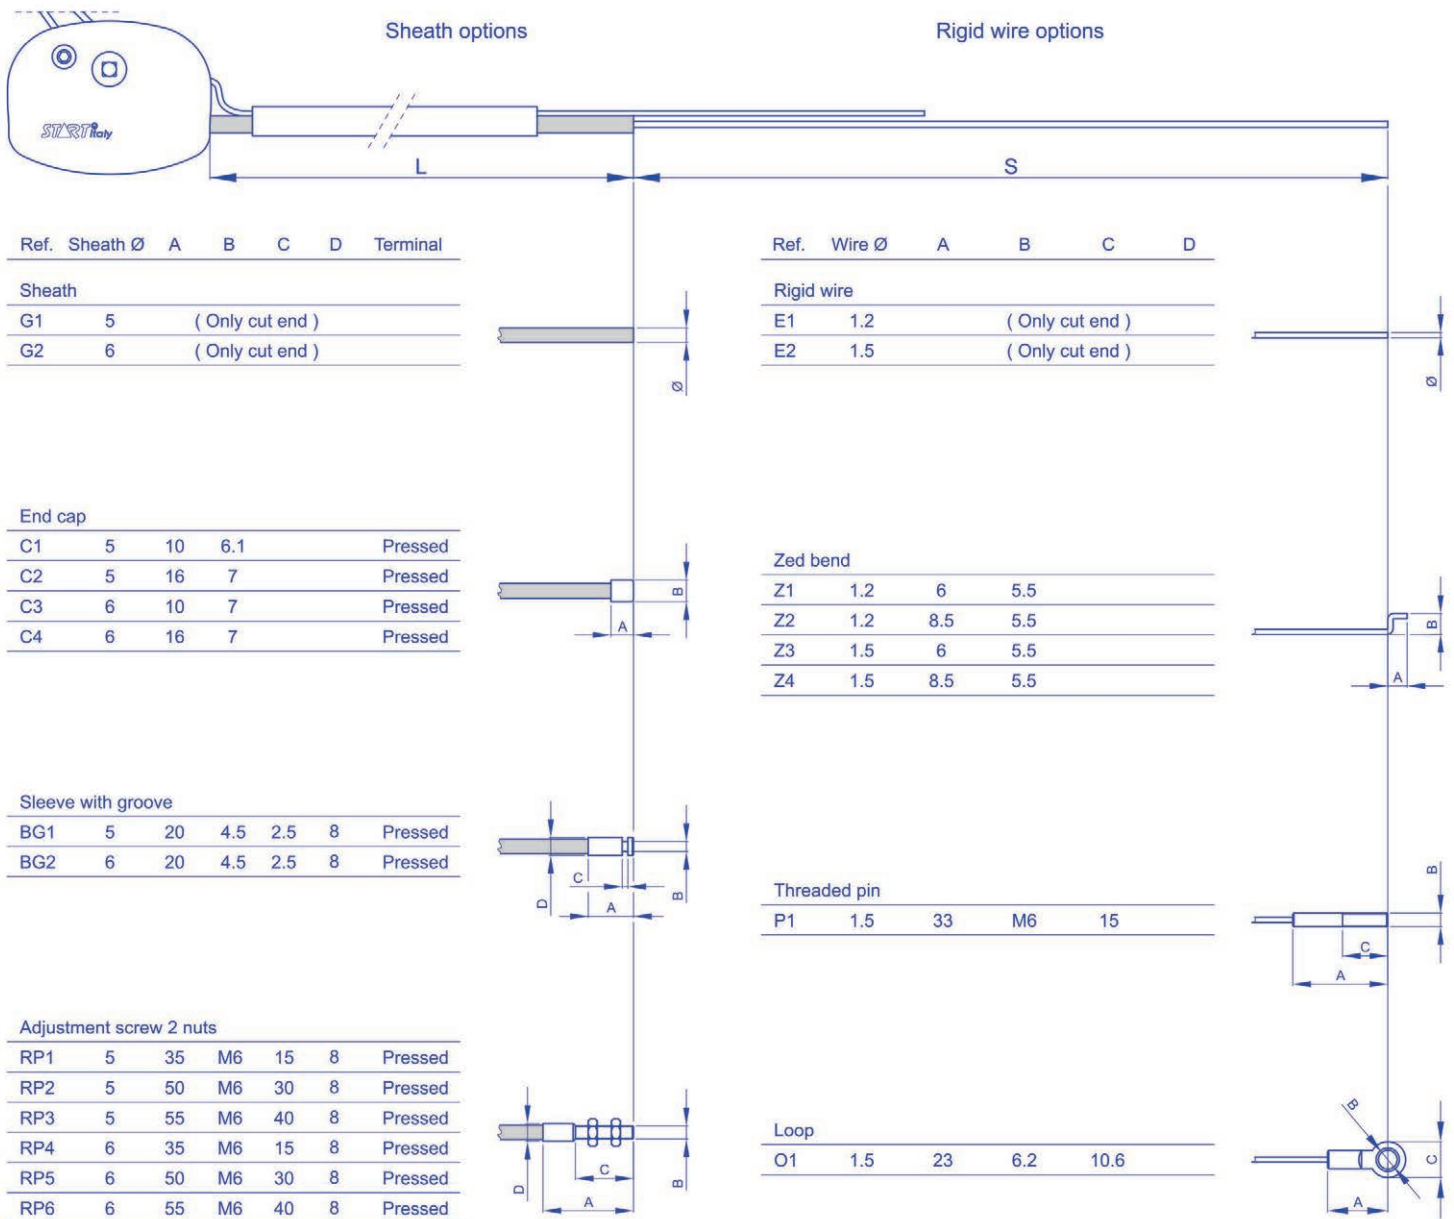



COMBINED ELECTRIC / MECHANICAL CONTROLS ORDER FORM FOR COMPATIBLE CABLES MODEL AE 300SEL

To order:

The technical options that are represented on the opposite page are the standard personalizations which are provided from the company.

Among these possibilities, you can choose the cable construction that meets your requirements.



At first choose the sheath diameter and select the corresponding terminals among the possible options.

Find out your preferences and fill in the boxes with the number or the letters/number corresponding to your options.

Example: if you choose a $\varnothing 6$ mm sheath and you want an end cap as terminal, indicate the code 05 or 06, according to your needs.

And so on for other variables.

The same procedure must be used to choose the wire: start choosing the diameter and then select the corresponding options.

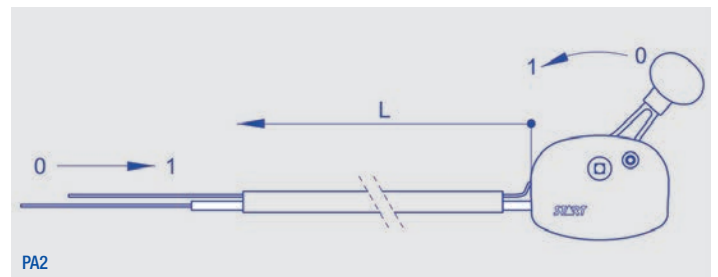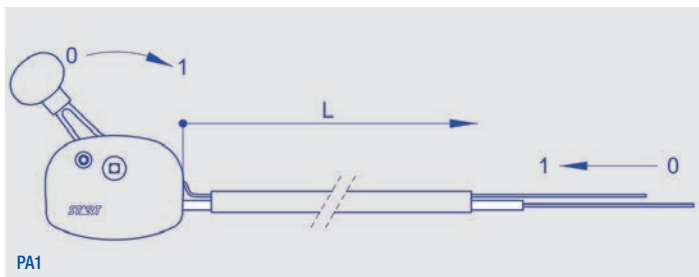

To order: compose, please, your product code inserting the boldfaced code corresponding to the chosen option in the proper square.

Cable							
-------	--	--	--	--	--	--	--

Sheath length (L) in mm: _____

Wire protrusion length (S) in mm: _____

Cable assembly: **PA1**

Cable assembly: **PA2**

Sheath $\varnothing 5$ mm (only cut) G1: **01**

Sheath $\varnothing 6$ mm (only cut) G2: **02**

End cap C1: **03**

End cap C2: **04**

End cap C3: **05**

End cap C4: **06**

Snap with groove BG1: **07**

Snap with groove BG2: **08**

Pressed adjustment screw 2 nuts RP1: **09**

Pressed adjustment screw 2 nuts RP2: **10**

Pressed adjustment screw 2 nuts RP3: **11**

Pressed adjustment screw 2 nuts RP4: **12**

Pressed adjustment screw 2 nuts RP5: **13**

Pressed adjustment screw 2 nuts RP6: **14**

Only cut rigid wire $\varnothing 1,2$ mm without terminal E1: **15**

Only cut rigid wire $\varnothing 1,5$ mm without terminal E2: **16**

Zed bend Z1: **17**

Zed bend Z2: **18**

Zed bend Z3: **19**

Zed bend Z4: **20**

Threaded pin P1: **21**

Loop O1: **22**



COMBINED ELECTRIC / MECHANICAL CONTROLS COMPATIBLE ELECTRIC CABLES MODEL AE 300SEL


Characteristics:

Cable outer diameter: $\varnothing 1 \times 0,75$ mm

Cable length: upon request

Wire terminals: see table

Cable conduit diameter: 10 mm.

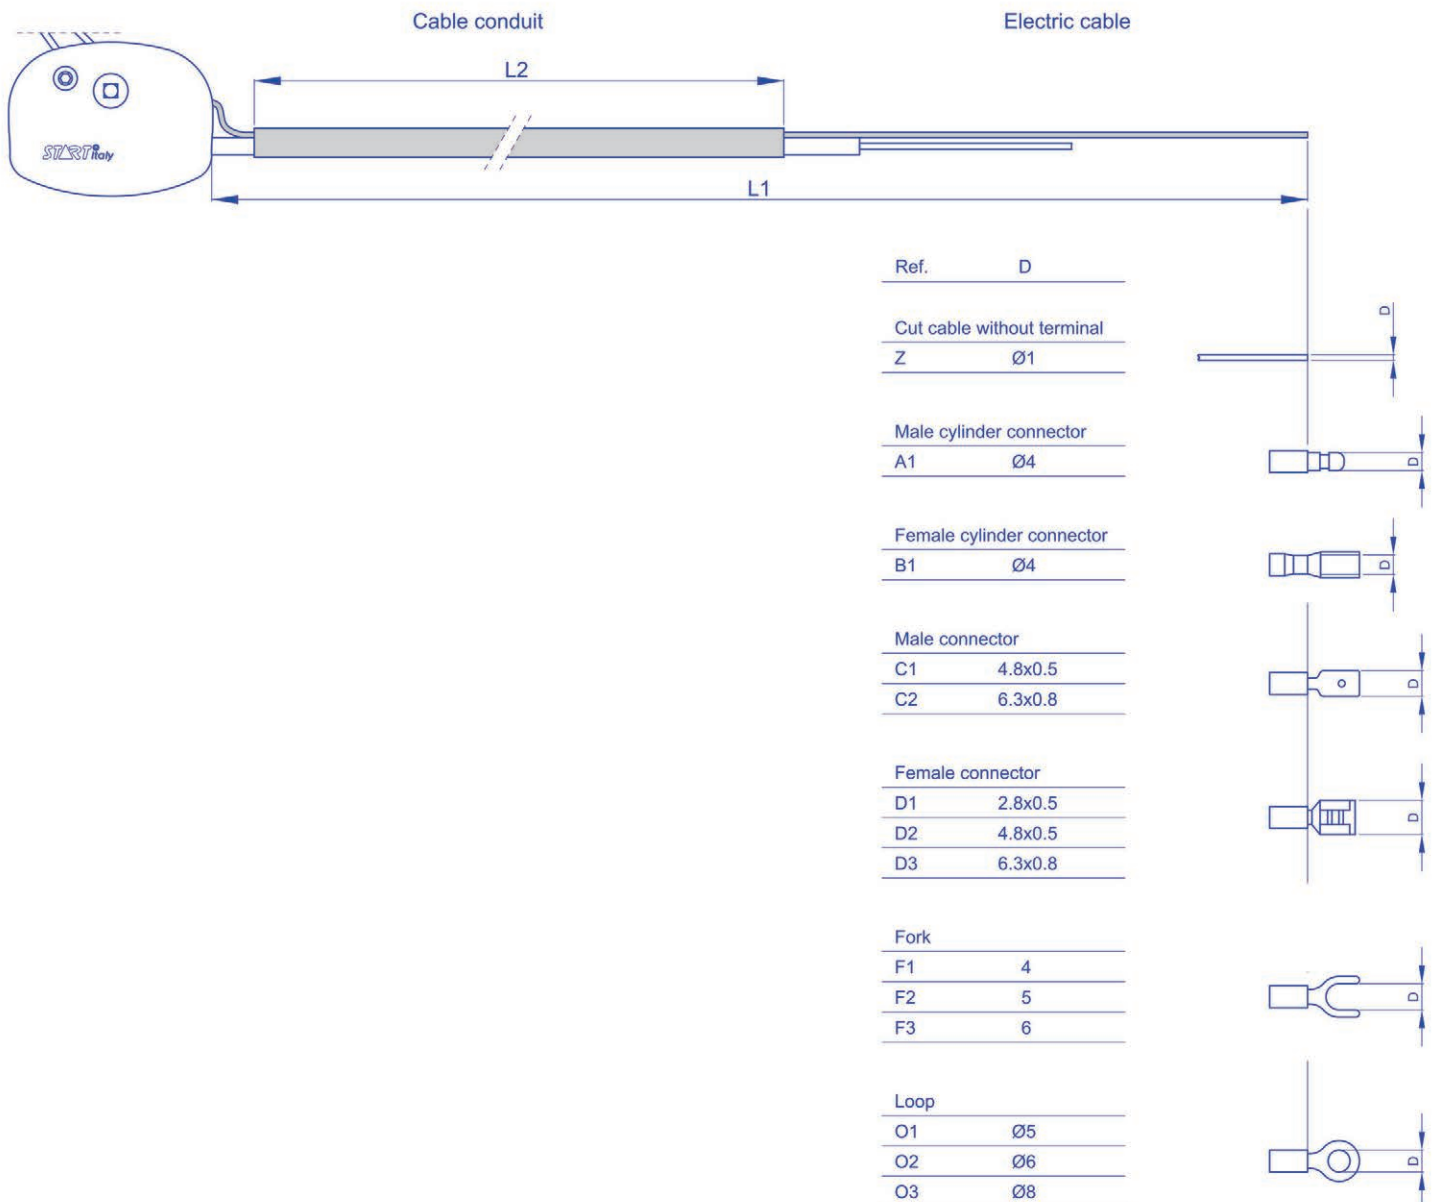



COMBINED ELECTRIC / MECHANICAL CONTROLS ORDER FORM FOR COMPATIBLE ELECTRIC CABLES MODEL AE 300SEL

To order:



The technical options that are represented on the opposite page are the standard personalizations which are provided from the company.

Among these possibilities, you can choose the cable construction that meets your requirements.

At first select the corresponding terminals among the possible options.

Find out your preferences and fill in the boxes with the number or the letters/number corresponding to your options.

Example: if you want a loop as terminal, indicate the code 12 or 13 or 14, according to your needs and so on for other variables.

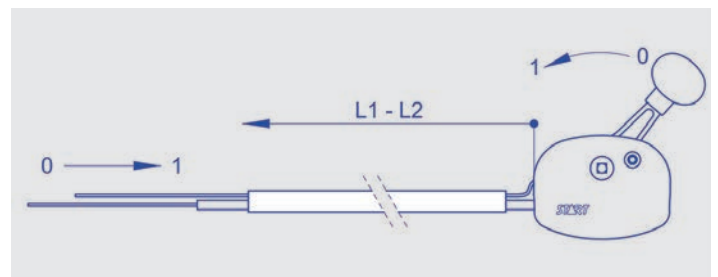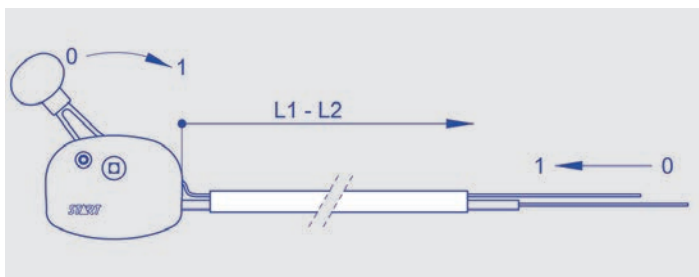

To order: compose, please, your product code inserting the boldfaced code corresponding to the chosen option in the proper square.

Cable			
-------	--	--	--

Electric cable length (L1) in mm: _____

- Cut cable without terminal Z: **01**
- Male cylinder connector A1: **02**
- Female cylinder connector B1: **03**
- Male connector C1: **04**
- Male connector C2: **05**
- Female connector D1: **06**
- Female connector D2: **07**
- Female connector D3: **08**
- Fork F1: **09**
- Fork F2: **10**
- Fork F3: **11**
- Loop O1: **12**
- Loop O2: **13**
- Loop O3: **14**

Cable conduit length (L2) in mm: _____